

8-Channel Lens Signal Switcher (with terminal block)

【Specifications】

Input: Control BOX "CB-3" DIN4 pin × 1

Allowable Current: 0.5A

Applicable lens: 6 (4) Wire method (loose cable end)

Number of lenses that can be connected: Up to 8 lenses

Lens connection: M3 threaded terminal block, jack-to-terminal
pitch 7.62mm

Switching method : Interlocking type (1channel selection)


Operating temperature range: -10~+50°C

Dimensions: 200 × 140 × 100mm

【Configuration】

Signal switcher.....1 CB-3 connection cable (DIN4 male-male)

【Exterior appearance】

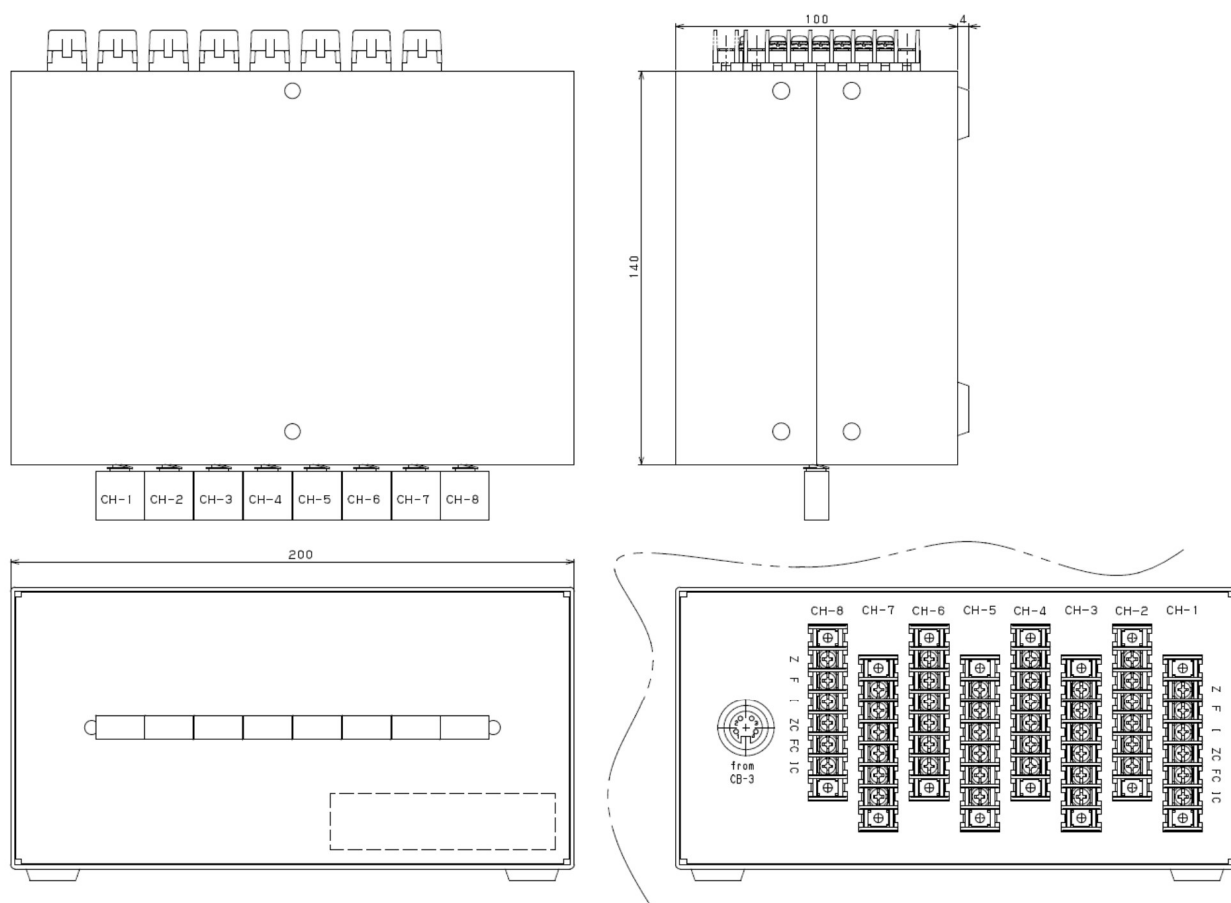

※1. When switch button is pushed down and becomes "ON", color of frontal button changes from black to red.


※2. Due to the nature of the switch, there are rare cases where 2 channels are turned on at the same time.

In this case, please press the button again so that it becomes every 1channel. Simultaneous operation of 2 units or more lenses will cause the operating power of this unit and the CB-3 to deviate from the allowable range of use.

Specifications, appearance, etc. are subject to change without notice.

CA2917X00

【Circuit Diagram】

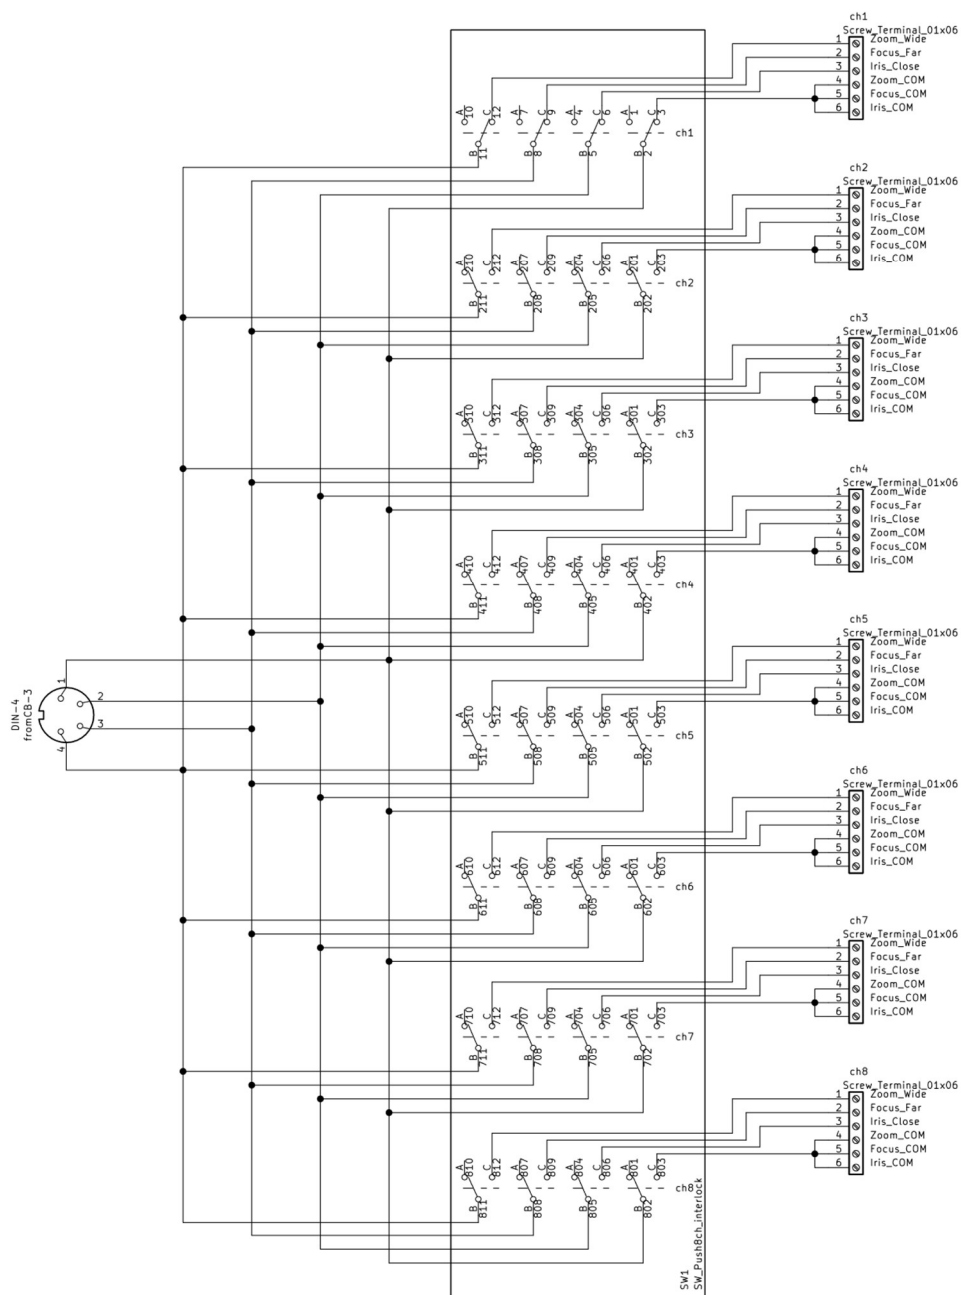

Specifications, appearance, etc. are subject to change without notice.

CA2917X00